
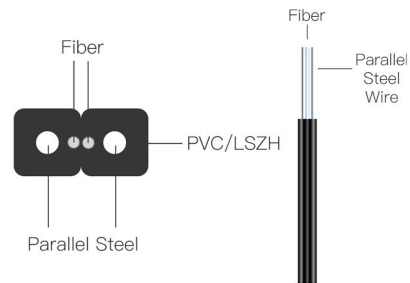


# MapleArashi

Fiber Optic Cable Manufacturer

## Indoor Bow-Type Drop Cable - GJXV

## Cable Structure - GJXV

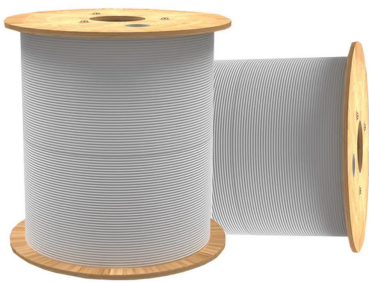

## GJXV Indoor FTTH Bow-Type Drop Cable

### Indoor FTTH | Steel Wire Strength Members | PVC Sheath

Indoor FTTH | Bow-Type Flat Structure | Steel Wire Strength Members | PVC Sheath

GJXV is an indoor FTTH bow-type drop cable designed for subscriber access, indoor routing, and terminal connection applications. The cable uses a compact flat structure with optical fiber positioned between two parallel steel wire strength members, protected by a PVC sheath. Final cable parameters, fiber type, sheath material, strength member design, and optional variants are subject to project requirements and confirmed cable design.

Product	GJXV
Model	GJXV
Category	FTTH Drop Cables - Indoor Drop Cables
Structure	Indoor bow-type FTTH drop cable with steel wire strength members, PVC sheath

*This specification is for reference only. Final cable design parameters are subject to project requirements and manufacturing feasibility.*

## 1. Product Information

Field	Specification
Product	GJXV
Model	GJXV
Category	FTTH Drop Cables - Indoor Drop Cables
Structure	Indoor bow-type FTTH drop cable with steel wire strength members and PVC sheath
Fiber Type	G.657A1 / G.657A2 / G.652D; subject to project requirements
Number of Fibers	Subject to final cable design and project requirements
Strength Member	Steel wire strength members, subject to final cable design
Sheath Material	PVC, subject to project requirements
Sheath Color	Subject to project requirements
Application	Indoor FTTH subscriber access / terminal connection / indoor routing

## 2. Company Profile

Maplearashi Technology, with 20 years of expertise in fiber optic communication, manufactures GJXV indoor FTTH bow-type drop cables with steel wire strength members and PVC sheaths in our facility located in the Guangdong-Hong Kong-Macao Greater Bay Area. The compact flat design facilitates indoor wall-mounted and conduit routing for fiber-to-the-home subscriber connections. Compliance documents available upon request.

## 3. Product Overview

GJXV is an indoor FTTH bow-type drop cable designed for subscriber access, indoor routing, and terminal connection applications. The cable uses a compact flat construction with optical fiber positioned between two parallel steel wire strength members, protected by a PVC sheath. This design supports easy termination, field connectorization, and compact indoor routing, subject to project requirements and confirmed cable design.

## 4. Key Features

- Indoor bow-type FTTH drop cable design for subscriber access applications
- Steel wire strength members for enhanced mechanical pull strength in indoor routing
- PVC sheath for indoor general-purpose performance
- Compact flat structure supports wall-mount, conduit, and corner routing in indoor environments
- Compatible with standard FTTH field termination and connectorization solutions
- Available in G.657 bend-insensitive fiber types for tight indoor routing

## 5. Recommended Use

- Indoor FTTH subscriber access from building entrance to terminal
- Wall-mounted indoor routing in apartments, offices, and residential buildings
- FTTH terminal box and ONT connection
- Apartment, office, and residential indoor fiber-to-the-home access

## 6. Installation Benefits

- Compact flat cable body for easier indoor routing
- Steel wire strength members provide additional pull strength for vertical riser and conduit routing
- Easy stripping and field termination
- Suitable for FTTH terminal box and ONT connection

## 7. Technical Specifications

### 7.1. Cable Structure

Layer	Component	Material / Function
1	Optical Fiber	G.657A1 / G.657A2 / G.652D; subject to project requirements
2	Strength Member	Two parallel steel wire strength members, subject to final cable design
3	Cable Body	Flat bow-type construction
4	Outer Sheath	PVC, subject to project requirements

*Material and design details can be adjusted according to fiber type, count, and project needs.*

## 8. Applications

- Indoor FTTH subscriber access from building entrance to terminal
- Indoor horizontal routing in apartments, offices, and residential buildings
- FTTH terminal box and ONT connection
- Indoor wall-mounted or conduit-routed access links
- Indoor fiber distribution where steel wire strength member drop cable is required

## 9. Design Notes

- Mechanical parameters subject to final cable design
- Designed for indoor use per project requirements
- Not designed for outdoor self-supporting aerial installation without additional cable design confirmation
- GJXV uses steel wire strength members. GJXFV uses non-metallic strength members.
- GJXV uses PVC sheath. GJXH uses LSZH sheath.
- GJXV is an indoor bow-type FTTH drop cable. GJYXCH and similar models are outdoor self-supporting variants.

## 10. Indoor Installation Notes

- Avoid excessive pulling force during indoor routing
- Keep bend radius according to project-specific cable design and fiber type
- Use suitable clips, conduits, or trunking for indoor wall routing
- Confirm sheath material and color with project requirements before mass production

## 11. Handling & Termination Notes

- Use proper stripping tools for bow-type drop cable
- Avoid twisting or sharply bending the cable during installation
- Confirm fiber type and sheath color before batch production
- Suitable for field connector, pigtail, or terminal box installation

## 12. Fiber Options

Fiber Type	Description
G.652D	Standard single-mode fiber — ITU-T G.652.D standard
G.657A1	Bend-insensitive fiber — ITU-T G.657.A1 standard
G.657A2	Enhanced bend-insensitive fiber — ITU-T G.657.A2 standard
Custom	Other fiber types available per project requirements

## 13. Installation Guidance

- Installation temperature and pulling tensions subject to project-specific cable design
- Minimum bend radius during installation: refer to project-specific datasheet
- Indoor routing only, unless outdoor-specific cable design is confirmed
- Compatible with standard indoor FTTH termination and splicing procedures

## 14. Model Comparison & Reference

### GJXV vs GJXH

Parameter	GJXV	GJXH
Strength Member	Steel wire / metallic	Steel wire / metallic
Sheath	PVC	LSZH
Application	Indoor FTTH bow-type drop cable	Indoor FTTH bow-type drop cable
Note	PVC vs LSZH sheath	See separate GJXH specification

### GJXV vs GJXFV

Parameter	GJXV	GJXFV
Strength Member	Steel wire / metallic	Non-metallic
Sheath	PVC	PVC
Application	Indoor FTTH bow-type drop cable	Indoor FTTH bow-type drop cable
Note	Steel wire vs non-metallic	See separate GJXFV specification

### GJXV vs GJXFH

Parameter	GJXV	GJXFH
Strength Member	Steel wire / metallic	Non-metallic
Sheath	PVC	LSZH
Application	Indoor FTTH bow-type drop cable	Indoor FTTH bow-type drop cable
Note	Steel wire + PVC vs non-metallic + LSZH	See separate GJXFH specification

## 15. Customization Options

- Fiber type and count per project requirements
- Sheath color and marking per project requirements
- Alternative sheath materials subject to project requirements
- Alternative strength member designs subject to project requirements
- Sheath marking, meter marking, and cable color
- Drum length and packaging per project or shipping requirements

### Maplearashi

MapleArashi | [maplearashi.com](http://maplearashi.com)

Email: [sales@maplearashi.com](mailto:sales@maplearashi.com) | WhatsApp: +86 189 9307 0653

Shenzhen Maplearashi Technology Co., Ltd. | Guangdong-Hong Kong-Macao Greater Bay Area, China